



### Cell Type N-250AAA Specifications

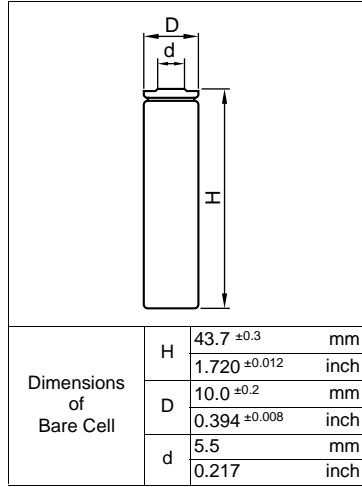


Nominal Capacity		250mAh	
Nominal Voltage		1.2V	
Charging Current	Standard	25mA	
	Quick	75mA	
	Fast	375mA	
Charging Time	Standard	14 to 16Hrs.	
	Quick	4 to 6Hrs.	
	Fast	about 1Hr.	
Ambient Temperature	Charge	Standard	0°C to +45°C [+32°F to 113°F]
		Quick	10°C to +45°C [+50°F to 113°F]
		Fast	0°C to +45°C [+32°F to 113°F]
	Discharge	-20°C to +60°C [-4°F to 140°F]	
Storage		-30°C to +50°C [-22°F to 122°F]	
Internal Impedance (Av.) (at 50% discharge)		24.0mΩ (at 1000Hz)	
Weight		11g/0.39oz	
Dimensions(D)×(H) (with tube)		10.5 <sup>0</sup> <sub>-0.5</sub> × 44.5 <sup>0</sup> <sub>-1</sub> mm	
		0.41 <sup>0</sup> <sub>-0.02</sub> × 1.75 <sup>0</sup> <sub>-0.04</sub> inch	

### Typical Characteristics


Charge

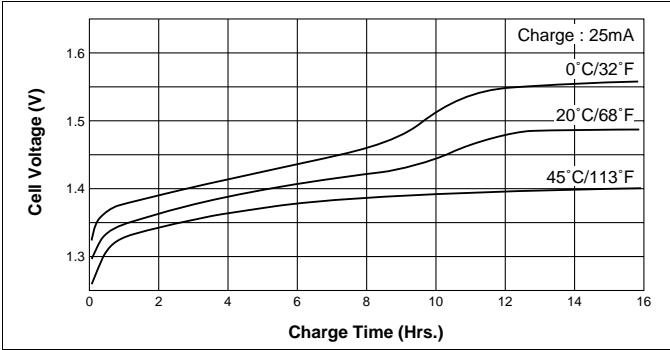


Discharge (at high rate)

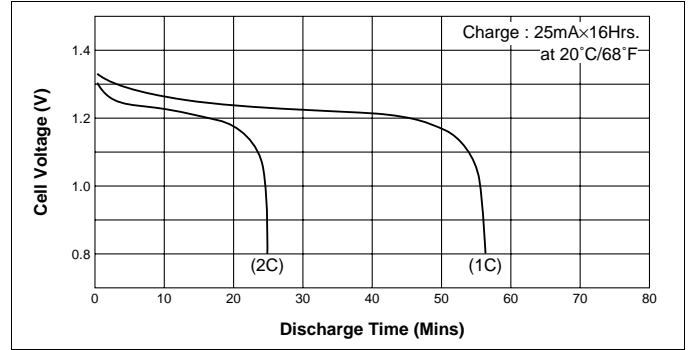


Charge

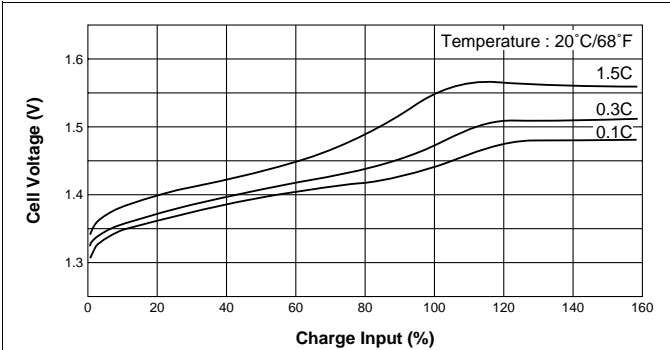

Discharge (at high rate)

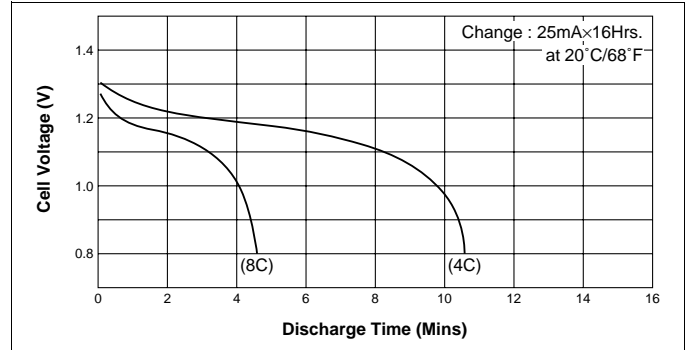

Discharge (at low rate)

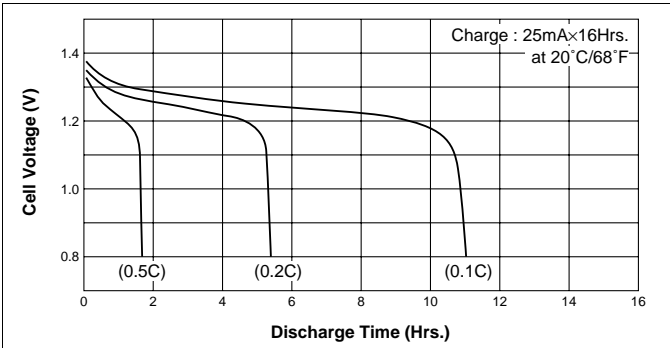

Temperature (Charge & Discharge)

